

Cebeco

SafEye MODEL 200

OPEN PATH GAS MONITORING SYSTEMS



WELL-PROVEN HIGH RELIABILITY



MAIN FEATURES

PROVEN TECHNOLOGY

Used in highly sensitive areas to detect low gas concentration levels to activate alarms measures only when specific hazardous concentration levels are exceeded.

Thousands installed on offshore platforms, FPSO's, refineries, etc., for British Petroleum (BP), Shell, ExxonMobil, Statoil and others.

COST SAVING

One system can replace from 5 to 20 point gas detectors in a straight line of sight, up to 460 ft. (140 m). Low cost of ownership, much lower installation cost!

FAST RESPONSE

Adjustable light source flash rate gives high sensitivity and extremely fast detection time. Also prevents detector going into obscuration when a large cloud of gas passes through the beam.

HARSH ENVIRONMENT

Specially designed to perform under extreme conditions such as high-speed airflows, humidity and corrosive gases where point detectors may not be effective.

LOW MAINTENANCE

High reliability, simple installation, alignment and maintenance, equipment not subject to poisoning.

STANDARD INTERFACE OPTIONS

Standard 4-20 mA outputs or RS-485 output to allow networking (up to 64 detectors) to a central monitoring/PC system.

This feature also enables easy maintenance, local and remote diagnostic tools.



SafEye 200 Series Open Path Gas Detector is a self-contained, fast response optical gas detection system. It detects combustible gases at concentrations lower than the explosion limit (LEL) over a "Line of Sight" of up to 460 ft. (140 m) long.

SafEye is the preferred system for offshore oil companies because it is immune to false alarms caused by partial blockage and extreme weather conditions (fog, rain, snow) and direct or reflected sunlight, flame and other black body radiation sources.



The SafEye system can be factory calibrated to a gas mixture most probable to leak in a specific location. This results in the most accurate gas concentration measurement.

The SafEye is fully functional in heavy fog, rain, etc, that results in up to 90% of the signal obscuration. In a North Sea offshore installation, tested for over six harsh winter months which included very dense fog, snow and rain, the SafEye was fully operational at all times.

SafEye is built for reliability and continued operation under all types of extreme environmental conditions. This is the field experience, which is demonstrated by the SafEye operational installations, ranging from the very humid and hot Far East to the wet and cold North Sea to the dry and cold slopes of Alaska.

The SafEye, due to its special optics design, provides for a misalignment tolerance of 1° in all directions and is protected against false gas reading and alarms.

The SafEye unique flash source gives a very powerful radiation signal for a very short time, less than one millisecond at pre-selected intervals. This patented feature enables the detector to address only the high intensity and ultra fast signals that correspond to fast changes in gas concentration, while ignoring all other background radiation.

GENERAL SPECIFICATIONS

Detected Gases	Simultaneous detection of C1-C8 flammable gases.					
Detection Range and Response Time	Model No.	202	203	204	226	227
	Distance (ft)	9.8-39	33-131	50-198	98-295	164-460
	Distance (m)	3-12	10-40	15-60	30-90	50-140
	Response Time	2 sec.	5 sec.	5 sec.	5 sec.	5 sec.
Immunity to False Alarm	Is not influenced by solar radiation, hydrocarbon flames and other external IR radiation sources.					
Spectral Response	3.0-4.0 μm					
Sensitivity Range	0-5 LEL x M Standard 0-2 LEL x M					
Displacement/Misalignment Tolerance	1°					
Drift	Long-term $\pm 5\%$ of full scale					
Temperature Range	-40°F (-40°C) to 131°F (55°C)					

ELECTRICAL SPECIFICATIONS

Power Supply	Standard - 24 VDC (18-32 VDC)
Power Consumption	Detector: 150mA @ 24 VDC (200 mA Peak) Source: 100mA @ 24 VDC (220 mA Peak)
Electrical Connection	2 x 3/4" - 14NPT conduits or 2 x M25 x 1.5 mm ISO
Electrical Input Protection	Complete electrical interface protection against reversed polarity voltage, surges and spikes according to MIL-STD-1275
Electromagnetic Compatibility	EMI/RFI protected CE Marked

OUTPUTS

4-20mA	The 4-20mA current output is source configuration Resistance Loop 100-600 Ω			
RS-485	Serial communication for full control with maintenance and trouble shooting facility can be integrated for a network of max 64 detectors			
Relays		Type	Normal Position	Maximum Ratings
	Alarm	SPDT	NO, NC	2A at 30 VDC or 0.5 at 250 VAC
	Accessory	SPST	Open	5A at 30VDC or 250VAC
	Fault	SPST	Closed	5A at 30VDC or 250 VAC

MECHANICAL SPECIFICATIONS

Dimensions	5.2" (132mm) x 5.2" (132mm) x max. 11" (280mm)		
Weight	Al. Encl.	Detector: max 8.8 lb (4 kg)	Source: max 10.8 lb (4.9 kg)
	St. Encl.	Detector: max 14.3 lb (6.5 kg)	Source: max 16.7 lb (7.6 kg)
Mechanical Design	The standard detector housing is heavy-duty, copper-free (less than 1%) aluminum. The housing is finished in white epoxy enamel and is also available in 316 Stainless Steel* upon request. * <i>Carries an additional charge.</i>		
Environmental Standards	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical shock, High Temp, Low Temp		
Water and Dust Tight	IP66 and 67 per En60529 NEMA 250 6P		


HAZARDOUS AREA APPROVALS

ATEX / Cenelec	SIRA 00ATEX 1161, EX II 2G: EExd IIB + H2 T6 (55°C) SIRA 00ATEX 1165, EX II 2G EExde IIB + H2 T6 (55°C)
UL	UL No. - E209870, Class I Groups C and D Hazardous Location
GOST R	Approved

Specifications subject to changes

ACCESSORIES

The following optional accessories designed for the SafEye system are available.

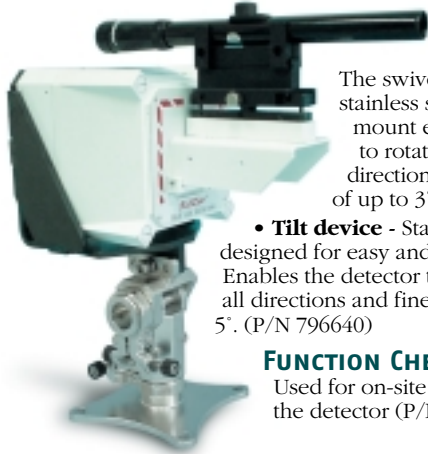

MOUNTING

- **Swivel mount** -

The swivel mount is made of stainless steel 316. The swivel mount enables the detector to rotate up to 30° in all directions and fine alignment of up to 3°. (P/N 794765).

- **Tilt device** - Stainless steel 316, designed for easy and precise alignment. Enables the detector to rotate up to 30° in all directions and fine alignment of up to 5°. (P/N 796640)

FUNCTION CHECK FILTER

Used for on-site functional testing of the detector (P/N 794260).

ALIGNMENT TELESCOPE

Is used for simple on-site alignment of the detector with the light source. (P/N 794110)

MAGNETIC SWITCH

The magnetic mode selector is used in the field to change the detector's modes for alignment and calibration procedures (P/N 790285).



TYPICAL APPLICATIONS

Offshore Oil & Gas Exploration Orlrigs and FPSOs; Onshore Oil & Gas Terminals; Storage Farms and Filling Stations; Petrochemical and Chemical Industries; Power Utilities and Turbines areas; Waste Processing and Treatment; Transportation Terminals; Automotive, Painting, Printing, Pharmaceutical Industries and many more...

Specific applications include: • Fence-line emission monitoring • Process and storage areas • Control rooms and auxiliary equipment enclosures • Vessels and tanks roof monitoring • Bus garages and terminals (switching from diesel to natural gas) • Pipelines • LNG-LPG storage, pumping and filling • Paint-booths and paint production

CONTACT INFORMATION

CEBECO PTY LTD
SYDNEY OFFICE:
UNIT 5C / 256 NEW LINE ROAD DURAL, NSW
2158, AUSTRALIA
PO Box: 691 PENNANT HILLS, NSW 1715
Tel: 61 2 9651 4220
Fax: 61 2 9651 4171
www: www.cebeco.com.au

PERTH OFFICE:
LEVEL 3 / 267 ST GEORGES TERRACE
PERTH WA 6000
PO Box 7798 CLOISTERS SQUARE
Ph: 61 8 6465 4599
Fax: 61 8 9261 7700



DS-G-200, April 2003

Patent No. US 5,281,816; US 6,061,141; EP 0584389

Cebeco