Electronic Sounders & Beacons

klaxon Industrial & Specialist

Sonos Sounder (DC)

Features

- Simple 'First Fix' installation (no second fix wiring)
- Smooth flow cabling for faster installation
- Quick connect/disconnect
- No locking screw required
- Tone and volume can be preset or adjusted off-base
- Weatherproof to IP65 (deep base units)
- Synchronised alarm tones

Overview

A general purpose electronic sounder for fire, security and industrial applications; the Sonos Sounder is certified to EN54.

With the TimeSaver base, connections are made to the base during the initial wiring phase which results in faster and more reliable installation. The sounder head 'twists and clicks' into the base on commissioning, avoiding the wiring and connection problems associated with traditional sounders.

With a choice of 32 tones including all the major international standards, the Sonos Sounder has universal acceptance.

Deep base units have weatherproof protection to IP65 and can be used in all locations both indoors and outdoors.

Sonos Sounder units are available in either red or white and with a choice of deep or shallow TimeSaver base. Other colours are available depending on quantity.

Applications

- Fire; security; industrial alarm

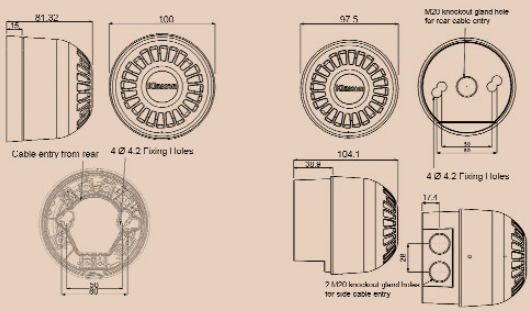

Shallow Base

Deep Base

- Fire
- Security
- Industrial
- Railway/Marine
- Hazardous Area
- Public Warning

Part No.	Colours	Audibility at 1m (tone dependent)	Tones	Voltage*	Current (tone dependent)
18-980450 (shallow base)	Red	Up to 106dB (A)	32	9-60V DC	6-35mA
18-980475 (shallow base)	White	Up to 106dB (A)	32	9-60V DC	6-35mA
18-980451 (deep base)	Red	Up to 106dB (A)	32	9-60V DC	6-35mA
18-980476 (deep base)	White	Up to 106dB (A)	32	9-60V DC	6-35mA

*EN54 compliant at 17-60V

Other colours/combinations are available on request

IP Rating: IP65 (deep base) Rating: Continuous Frequency: 400-2850Hz Operating Temp: -25ºC to +70ºC

Construction: Flame Retardant Polycarbonate Cable Entries: Deep Base: 2 x 20mm cable glands

Weight: 215g (shallow base) 250g (deep base) Compliance: EN54 3 Type A (shallow base) EN54 3 Type B (deep base)

CEBECO PTY LTD
SYDNEY OFFICE:
UNIT 5C / 256 NEW LINE ROAD DURAL, NSW 2158, AUSTRALIA
PO Box: 691 PENNANT HILLS, NSW 1715 Tel: 61 2 9651 4220
Fax: 61 2 9651 4171
www: www.cebeco.com.au

PERTH OFFICE:
LEVEL 3 / 267 ST GEORGES TERRACE
PERTH WA 6000
PO Box 7798 CLOISTERS SQUARE
Ph: 61 8 6465 4599
Fax: 61 8 9261 7700

Cebeco